

# FG220 2ZK

/ FLAT FINISHING MACHINE



## TECHNICAL SPECIFICATIONS

working capacity (mm)	220x200
feeding speed (m/min.)	6+12
feeding motor (kW)	0.45
abrasive belt speed (m/s)	20
abrasive belt dimensions (mm)	220x2200
abrasive belt motor (kW)	5.5 (x2)
abrasive brush speed (m/s)	15
abrasive brush dimensions (mm)	220xØ200
abrasive brush motor (kW)	4
total power (kW)	17
consumption (A)	32
dimensions (mm)	1910x1000x2200
weight (kg)	950

### DEMONSTRATION VIDEO



### STANDARD EQUIPMENT


- \_\_ Thickness gauge (1/10mm precision)
- \_\_ Ammeter for abrasive belt motor

### AVAILABLE ACCESSORIES


- \_\_ Variable speed package: conveyor belt (4-15m/min) + (x2) abrasive belt (10-25m/s) + abrasive brush (10-25m/s)
- \_\_ Dust extractor



\_\_ pressure and thickness adjustment with 1/10mm precision

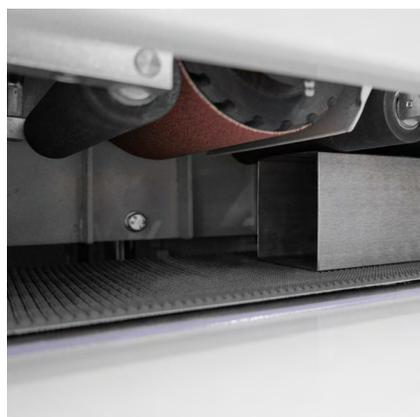

\_\_ pressure rollers before and after each abrasive station

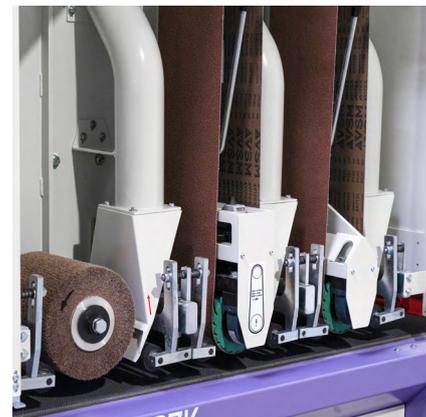

\_\_ independent abrasive station construction